



Water System Operations Manager's Report

Engineering and Operations Committee

Item 7a

May 12, 2014

Current Operational Conditions

- 2014 SWP Allocation at 5%
- SWP blend targets are 0% at Weymouth, Diemer, and Skinner
- The CRA is currently at an 8 pump flow
- April 2014 demands of 169 TAF were 6 TAF lower than April 2013
- Continuing implementation of Drought Actions

Jensen Plant Shutdown

Jensen Plant: May 8 – May 11



Greg Ave

Joseph Jensen
Water Treatment Plant

F.E. Weymouth
Water Treatment Plant

Robert B. Diemer
Water Treatment Plant

Henry J. Mills
Water Treatment Plant

Robert A. Skinner
Water Treatment Plant

LOS ANGELES

SAN BERNARDINO

VENTURA

RIVERSIDE

ORANGE

SAN DIEGO

Pacific Ocean



Miles

0 5 10

Jensen Plant Shutdown

- 4-day shutdown starting May 8
- Installed flow control gate at reservoir effluent
- Enhances reliability of delivering CRW to the western portion of Metropolitan service area

Jensen Plant Shutdown



Second Lower Feeder Shutdown

Second Lower Feeder: May 12 – July 14




Second Lower Feeder Shutdown

- Shutdown May 12 through July 14 to perform PCCP repairs
- 900 feet of steel lining
- No member agency service connections impacted during this shutdown



Etiwanda Pipeline Shutdown

Etiwanda Pipeline: May 1 – Sept 22

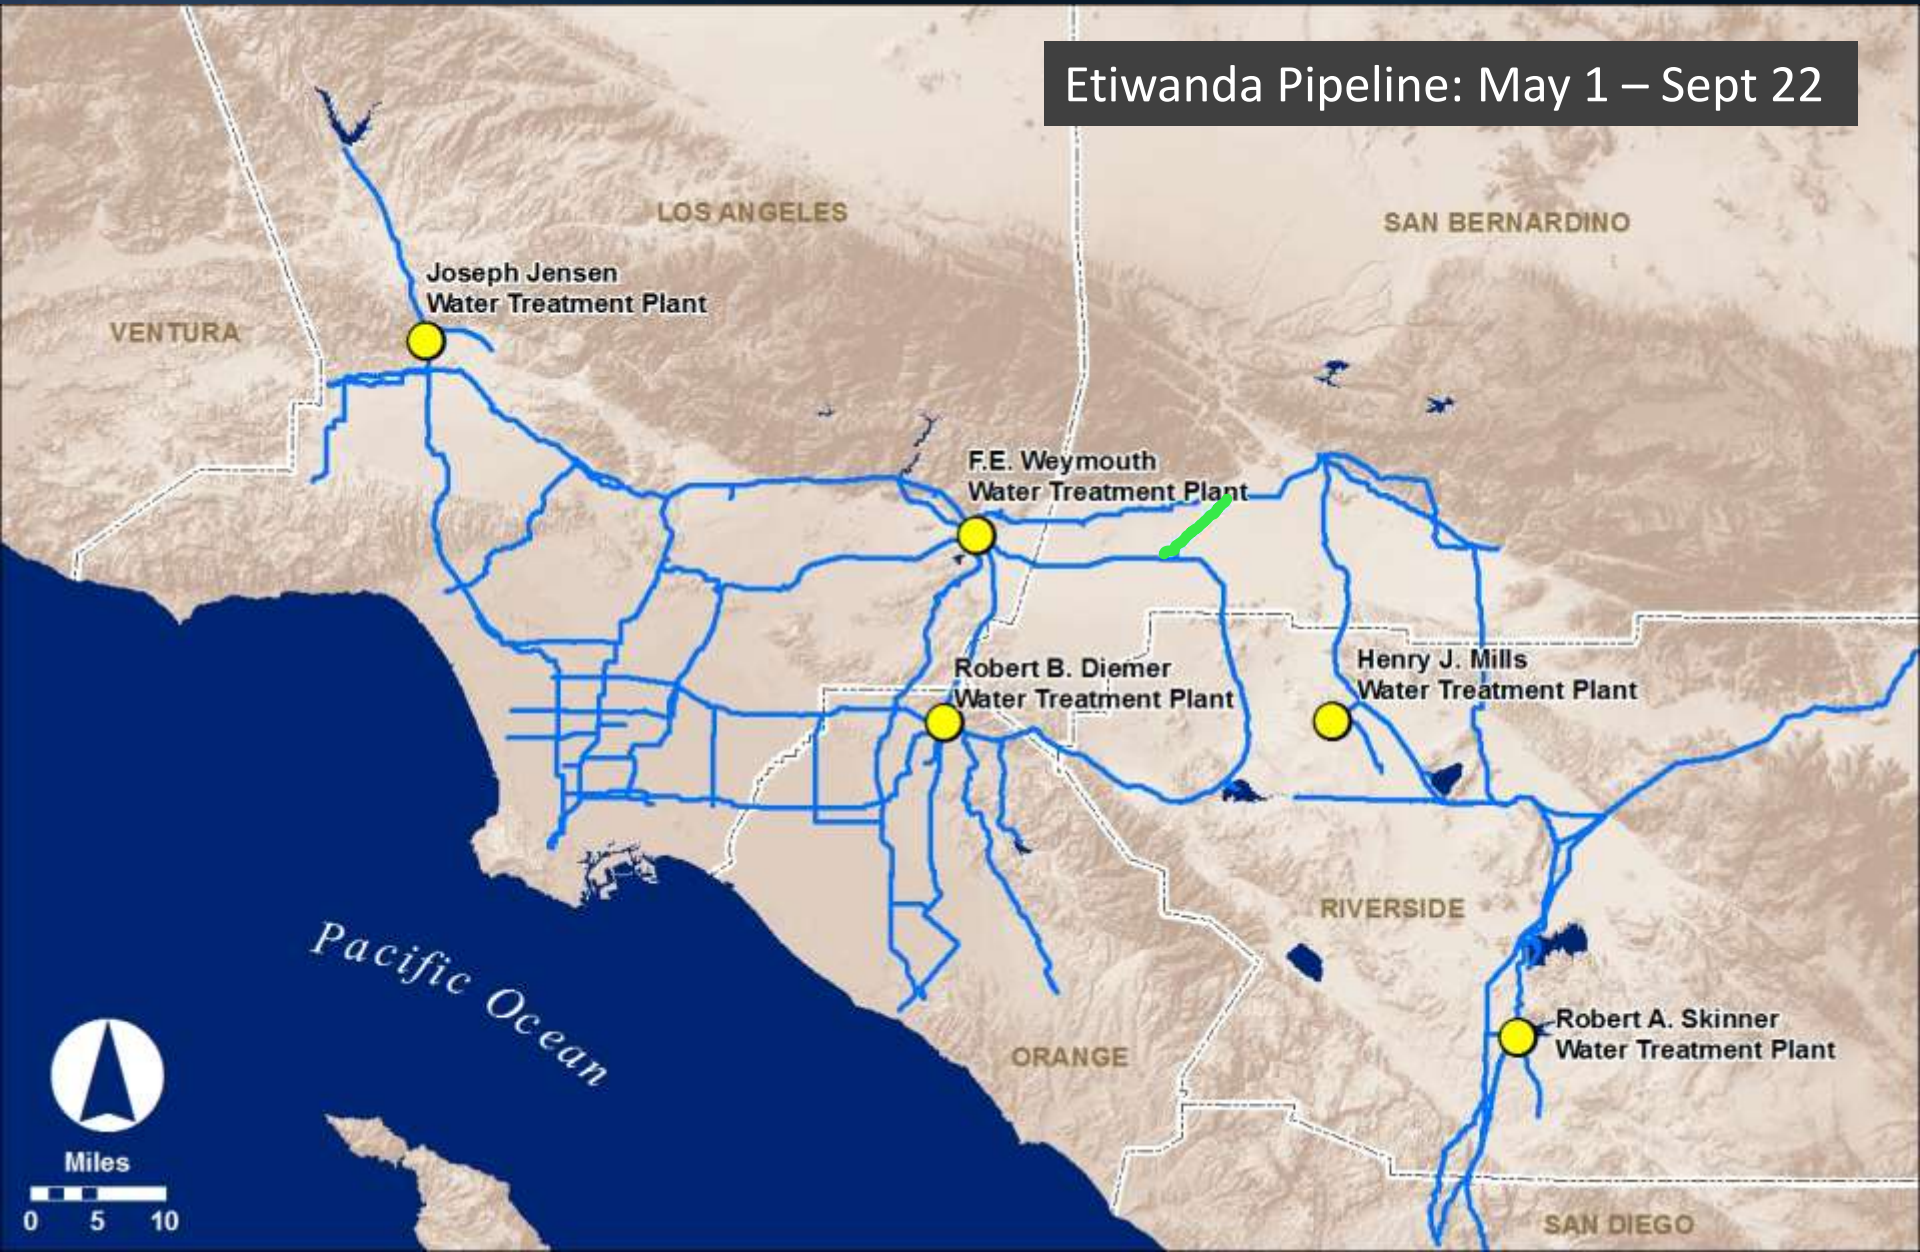

Miles



Etiwanda Pipeline Shutdown

- Shutdown from May 1 through September 22
- Phase 1 of the relining project
- 2,800 feet of pipeline will be relined
- One service connection affected

